

**CLOCKAUDIO®**

C008E-RF  
'RF FRIENDLY'  
BOUNDARY LAYER  
PROFESSIONAL  
MICROPHONE

Developed for speech purposes in a wide range of pro and live sound applications including conference, lecturn and theatre.





- Immune to RF artifacts
- Boundary layer condenser microphone
- Cardioid polar pattern
- Fully balanced
- High quality engineering in solid brass
- Concealed cable and fixing screw mounting
- Non-reflective stone grey nextel finish

PROFESSIONAL  
MICROPHONE  
SYSTEMS

C008E-RF  
 'RF FRIENDLY'  
 BOUNDARY LAYER  
 PROFESSIONAL  
 MICROPHONE

# SPECIFICATIONS

TYPE	Condenser (Back Electret)
POLAR PATTERN	Cardioid
FREQUENCY RESPONSE	50Hz - 18KHz
SENSITIVITY	-47dB ± 3dB @ 1KHz (0dB = 1VPa)
IMPEDANCE	200 Ohms
S/N RATIO	64dB (A)
MAXIMUM SPL	125dB 1% THD
POWER REQUIREMENTS	9 - 48 Volts Phantom Power
CABLE	3 metres
TERMINATION	Male 3 Pin XLR
DIMENSIONS	Length 70mm (2.76") Width 22mm (0.87") Weight 508g (17.9oz)
MOUNTING	2 x M6 set screws
FINISH	Stone Grey Nextel
SHIPPING INFORMATION	Length 111mm (4.37") Width 80mm (3.15") Depth 43mm (1.69") Weight 528g (18.7oz)

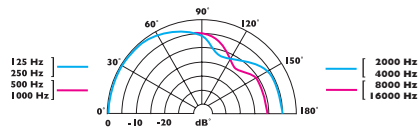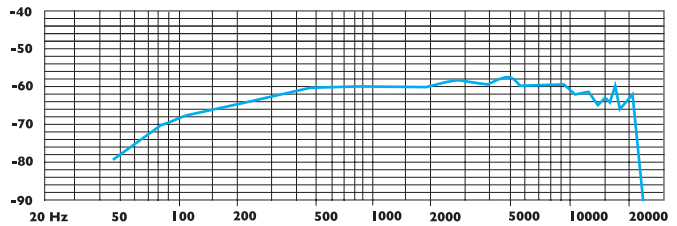

## CLOCKAUDIO®

### Clockaudio Ltd - Headquarters

22 Arnside Road, Waterlooville, Hampshire PO7 7UP, UK  
 Tel +44 (0)23 9225 1193 • Fax +44 (0)23 9225 1201  
 e-mail [sales@clockaudio.co.uk](mailto:sales@clockaudio.co.uk)

### Clockaudio North America Inc.

2891 du Meunier, Unit 103, Vaudreuil-Dorion, Quebec J7V 8P2, Canada  
 Tel: (450) 424-9797 • Fax: (450) 424-3660  
 e-mail: [info@clockaudio.com](mailto:info@clockaudio.com)

[www.clockaudio.com](http://www.clockaudio.com)

PROFESSIONAL  
 MICROPHONE  
 SYSTEMS