

**CLOCKAUDIO®**

C015E-RF/C016E-RF  
'RF FRIENDLY'  
DESK MOUNTED  
BOUNDARY LAYER  
MICROPHONES



- Immune to RF artifacts
- Omni-directional or Cardioid polar pattern
- Optimised for speech clarity
- Programmable touch pad switching
- Unobtrusive design
- Built in phantom power module
- Finished satin black





# C015E-RF/C016E-RF

## 'RF FRIENDLY'

### DESK MOUNTED BOUNDARY LAYER MICROPHONES

## SPECIFICATIONS

	C015E-RF	C016E-RF
TYPE	Condenser (Back Electret)	Condenser (Back Electret)
POLAR PATTERN	Omnidirectional	Cardioid
FREQUENCY RESPONSE	50Hz - 20KHz	50Hz - 18KHz
SENSITIVITY	-42dB $\pm$ 3dB @ 1KHz (0dB = 1VPa)	-47dB $\pm$ 3dB @ 1KHz (0dB = 1VPa)
IMPEDANCE	200 Ohms	200 Ohms
S/N RATIO	58dB (A)	60dB (A)
MAXIMUM SPL	120dB 1%THD	
SWITCHING	Programmable for PTT PTM & Latching	
POWER REQUIREMENTS	48 Volts Phantom Power	
TERMINATION	Male 5 Pin XLR with remote switch ability Optional Male 3 Pin XLR variant	
FINISH	Satin Black	
DIMENSIONS	Length 120mm (4.8") Width 100mm (3.94") Height 30mm (1.18") With Microphone Height 45mm (1.77")	
WEIGHT	604g (21.3oz)	
SHIPPING INFO	Length 187mm (7.4") Width 155mm (6.1") Depth 75mm (2.96")	
WEIGHT	718g (25.3oz)	

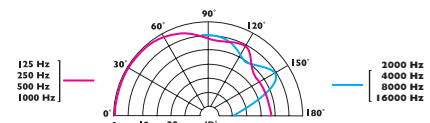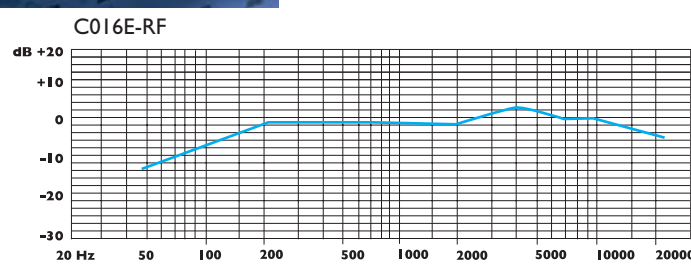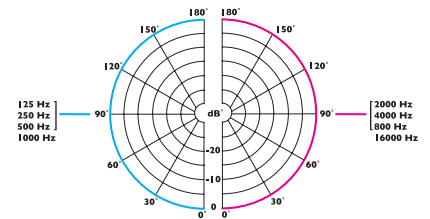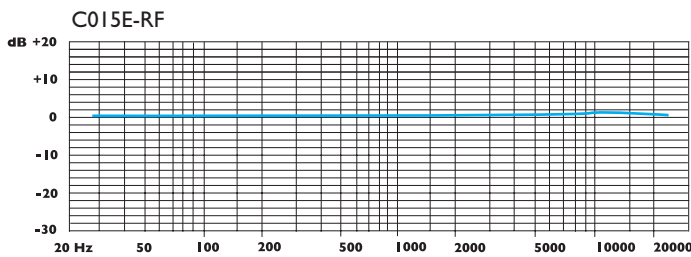

## CLOCKAUDIO®

### Clockaudio Ltd - Headquarters

22 Arside Road, Waterlooville, Hampshire PO7 7UP, UK  
Tel +44 (0)23 9225 1193 • Fax +44 (0)23 9225 1201  
e-mail [sales@clockaudio.co.uk](mailto:sales@clockaudio.co.uk)

### Clockaudio North America Inc.

2891 du Meunier, Unit 103, Vaudreuil-Dorion, Quebec J7V 8P2, Canada  
Tel: (450) 424-9797 • Fax: (450) 424-3660  
e-mail: [info@clockaudio.com](mailto:info@clockaudio.com)

[www.clockaudio.com](http://www.clockaudio.com)

PROFESSIONAL  
MICROPHONE  
SYSTEMS

As part of a continuous product improvement programme, we reserve the right to alter specifications without prior notice.