

CLOCKAUDIO®

C800E-RF/C801E-RF
'RF FRIENDLY'
MINI SHOTGUN
PROFESSIONAL
MICROPHONE

Developed for speech purposes
in a wide range of pro and live
sound applications including places
of worship, conference and
leisure centres, banks and financial
trading centres.



- Immune to RF artefacts
- Slim mini shotgun
- Optimised for speech clarity
- Superior grade components
- Unobtrusive slimline design
- Engineered in high quality brass
- Finished in Satin Black
- C801E-RF fitted with a knuckle joint giving both lateral and vertical movement

PROFESSIONAL
MICROPHONE
SYSTEMS



C800E-RF/C801E-RF 'RF FRIENDLY' MINI SHOTGUN PROFESSIONAL MICROPHONE

SPECIFICATIONS

TYPE	Condenser (back electret)			
POLAR PATTERN	Hypercardioid			
FREQUENCY RESPONSE	50 Hz - 18 KHz			
SENSITIVITY	- 47 dB +/- 3 dB at 1 KHz (0 dB = 1 V/Pa)			
IMPEDANCE	200 Ohms			
S/N RATIO	64 dB(A)			
MAXIMUM SPL	125 dB 1% THD			
POWER REQUIREMENTS	9 - 48 volts phantom power			
TERMINATION	Male 3 Pin XLR			
FINISH	Satin Black. Other finishes to special order			
ACCESSORIES	W8 foam windshield included			
DIMENSIONS	Overall length	Shaft diameter	Head diameter	Weight
800E-RF	458mm (18")	8mm (.31")	12mm (.47")	193 g (6.8oz)
801E-RF	262mm (10.3")	-	12mm (.47")	156 g (5.5oz)

Shipping Information

DIMENSIONS	Length	Width	Depth	Weight
C800E-RF	482mm (19")	35mm (1.4")	35mm (1.4")	241 g (8.5oz)
C801E-RF	360mm (14.2")	35mm (1.4")	35mm (1.4")	193 g (6.8oz)

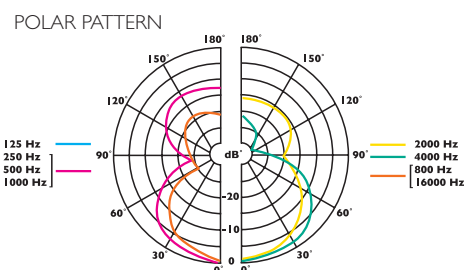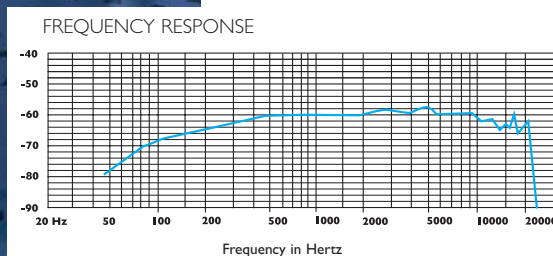

Supplied by:

CLOCKAUDIO®

Clockaudio Ltd - Headquarters

22 Amside Road, Waterlooville, Hampshire PO7 7UP UK
Tel +44 (0)23 9225 1193 • Fax +44 (0)23 9225 1201
e-mail sales@clockaudio.co.uk

Clockaudio North America Inc.

2891 du Meunier, Unit 103, Vaudreuil-Dorion, Quebec J7V 8P2, Canada
Tel: (450) 424-9797 • Fax: (450) 424-3660
e-mail: info@clockaudio.com

www.clockaudio.com

As part of a continuous product improvement programme, we reserve the right to alter specifications without prior notice.