


Aluminium column speakers specially designed to provide effective sound distribution in acoustically difficult or reverberant environments, such as places of worship, conference and meeting rooms, railway station halls, airport waiting or departure lounges, ports and large shopping

centres, where quality and intelligibility are the main parameters to guarantee clarity of information.

Wide horizontal coverage and a restricted vertical lobe ensure optimal results even in highly reverberant environments.

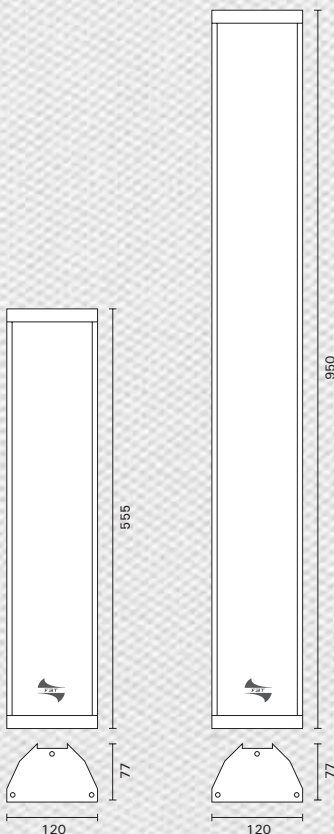

## SC 1 W

## Wall fastening bracket



	CS 2030 TW	CS 2031	CS 2040 TW	CS 2041 W
<b>Characteristics</b>	Column speaker in metal with white finish and transformer	Column speaker in metal with white finish	Column speaker in metal with white finish and transformer	Column speaker in metal with white finish and transformer
<b>Mounting system</b>	Wall mounted on bracket	Wall mounted on bracket	Wall mounted on bracket	Wall mounted on bracket
<b>Rated/maximum/power</b>	30W RMS (5, 7, 15W)	30W RMS	40W RMS (20, 10 W)	40W RMS
<b>Impedance</b>	333 ohm	40 ohm	250 ohm	72 ohm
<b>Frequency response</b>	200Hz~17kHz	100Hz~17kHz	200Hz~17kHz	100Hz~17kHz
<b>Dispersion angle (@-5dB 1kHz)</b>	180° x 60°	180° x 60°	180° x 40°	180° x 40°
<b>Sensitivity 1W/1m</b>	92dB	92dB	92dB	92dB
<b>Maximum SPL</b>	107dB	107dB	108dB	108dB
<b>Input voltage</b>	100V-70V	-	100V-70V	-
<b>Loudspeakers</b>	5 x 3" ¼	5 x 3" ¼	9 x 3" ¼	9 x 3" ¼
<b>Weight</b>	3.5kg	3.2kg	6kg	5.5kg
<b>Dimensions</b>	120 x 555 x 7mm	120 x 555 x 7mm	120 x 950 x 77mm	120 x 950 x 77mm
<b>Optional accessories</b>	Bracket SC-1W	Bracket SC-1W	Bracket SC-1W	Bracket SC-1W