


CS 849SR


CS 849SL

LOUDSPEAKER LINE & AMPLIFIER CONTROLLER

CS 849SR



CS 849SL

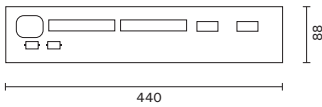


Working together with the MAN 918, the **CS 849SR** will monitor the status of the loudspeaker lines, using an accurate impedance monitoring circuit and, when applicable, automatically replacing amplifiers when or if they fail.

As well as providing system status information to the LCD screen of the MAN 918 / MAN 918L or appropriate PC, the CS 849SR is fully EN60849/BS5839 compliant and will connect with up to nine separate amplifiers/zones and one standby/replacement amplifier.


Further facilities include:

- LED System Status on front panel
- Integral Monitor Loudspeaker to allow each channel to be listened to
- 2 x PC Serial Interface Ports (PC and Amplifier)

The **CS 849SL** has similar facilities as the SR model but works with MAN 918L, with number of connectable amplifiers being limited to eight.

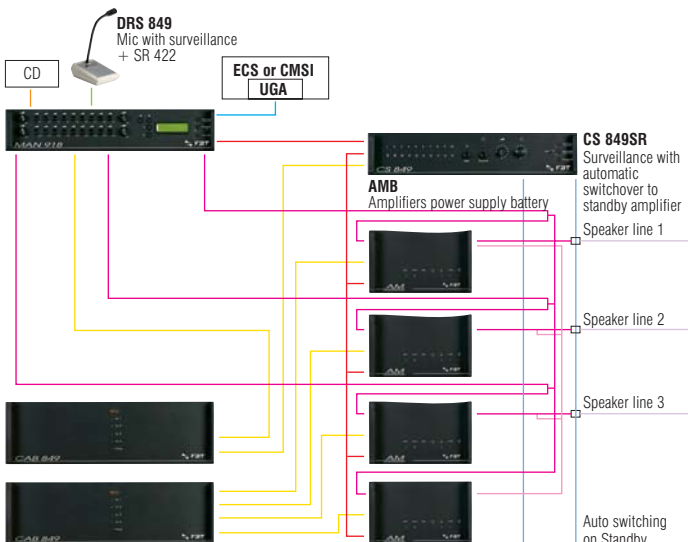

| | CS 849SR | CS 849SL |
|---------------------------|---------------------------|---------------------------|
| Microprocessor | PIC @ 4MHz | - |
| Serial link | RS422 | - |
| Switching controls | 9 | - |
| Capacity | 9 Amplifiers + 1 stand-by | 8 Amplifiers + 1 stand-by |
| Power supply | 230V AC-50Hz/20W 24V | 230V AC-50Hz/20W 24V |
| Rack-mount w/Kit | EQ2U-(7762) | EQ2U-(7762) |
| Dimensions | 440 x 88 x 335mm | 440 x 88 x 335mm |
| Weight | 1.5kg | 1.1kg |

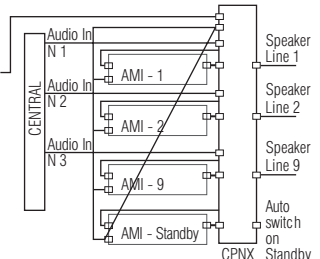

VOICE-EVAC SYSTEM