


2N

2N® Clip


The power of IP for every home



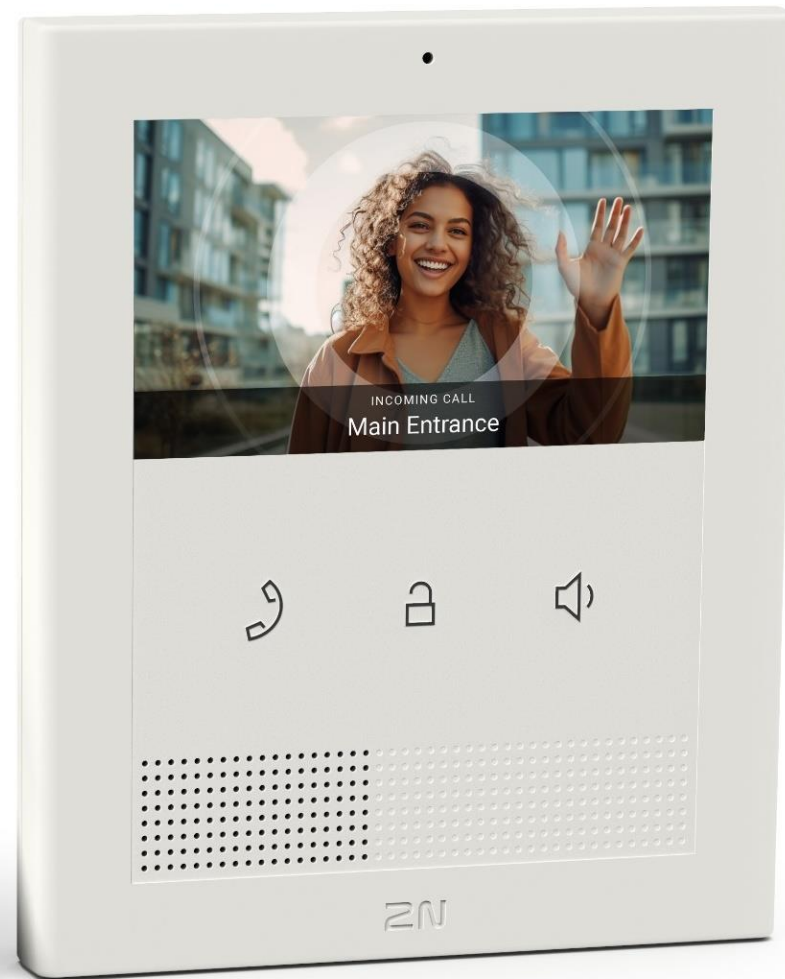

2N® Clip

The 2N® Clip is a new 4" video IP indoor station designed to **meet the rising demand** for more affordable housing.

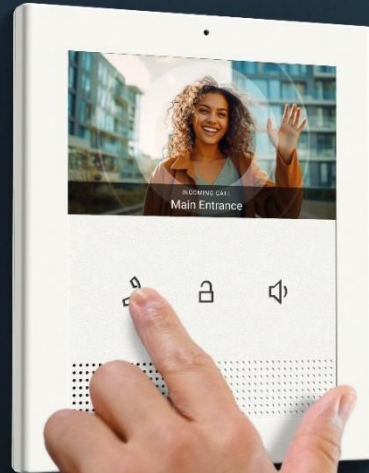

Increase security. Upgrade to IP video



INCOMING CALL
Main Entrance

Forget blurry videos from outdated analog units - high-quality IP video is the **new norm in modern living** and is much more secure. Meet the market's standards with the 2N® Clip!



Fits seamlessly into the 2N ecosystem

The 2N® Clip runs on the powerful, **reliable 2N OS** – the same as the most premium of products from our workshop. Plus, it can be remotely managed and configured via the My2N Management Platform

Install it in 3 minutes!



Drill in two screws and 'clip' the 2N® Clip to the wall! This has got to be the **fastest indoor station installation** on the market



Doorbell button support

Save money on a traditional doorbell. Simply connect the doorbell button to the 2N® Clip directly



Help the hearing-impaired

Choose a variant with a built-in induction loop for projects where accessibility is a priority



Easy decisions, quicker projects

Enjoy the beautiful simplicity of one colour, only two product variants and no accessories needed

Technical parameters

Power supply

Type	PoE
PoE	802.3af Class 0, 48 V DC, 200 mA

User interface

Controls	3 capacitive buttons
Operation	press and hold the RESET button to restore factory settings

Audio

Microphone	integrated
Speaker	integrated, 2W
Integrated induction loop	optional
Codecs	G.711a/u, G.722, G.729, L16/16 kHz

Video

Display	4.3" display
Resolution	480x272 pixels
Codecs	H.264

Interface

LAN	10/100BaseT, RJ-45
Recommended cabling	Cat5e or higher

Doorbell input

Input type	switching contact (button/relay)
Contact type	normally open (NO)
Contact parameters	12V/20mA, DC

Mechanical properties

Operating temperature	0 to 50°C
Storage temperature	-20 to 70°C
Relative operating humidity	10 to 90 % (non-condensing)
Recommended altitude	0 to 2000 m
Dimensions	124 (W) x 150 (H) x 28 (D) mm
Weight	235 g



Important technical parameters



Power supply

PoE

802.3af Class 0, 48 V DC,
200 mA

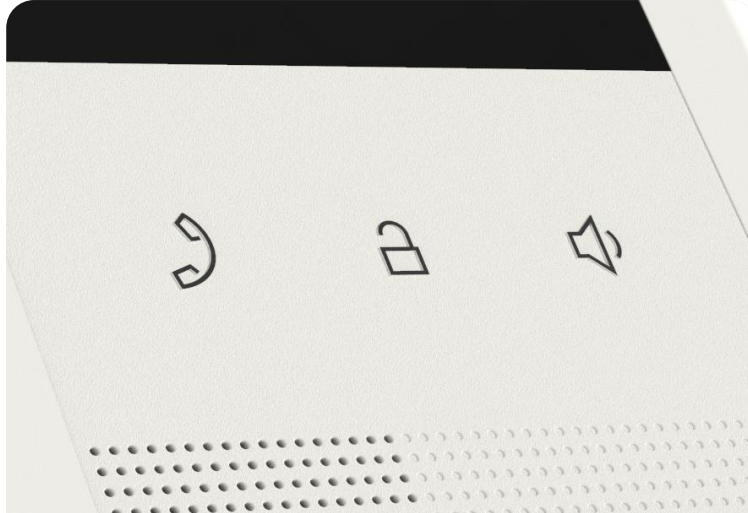

Controls

3 capacitive buttons





Display


4.3" display

480x272 pixels

Dimensions

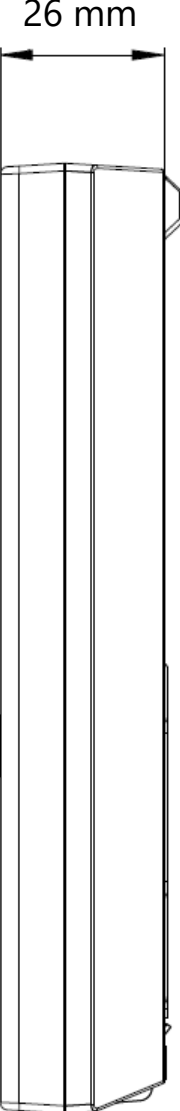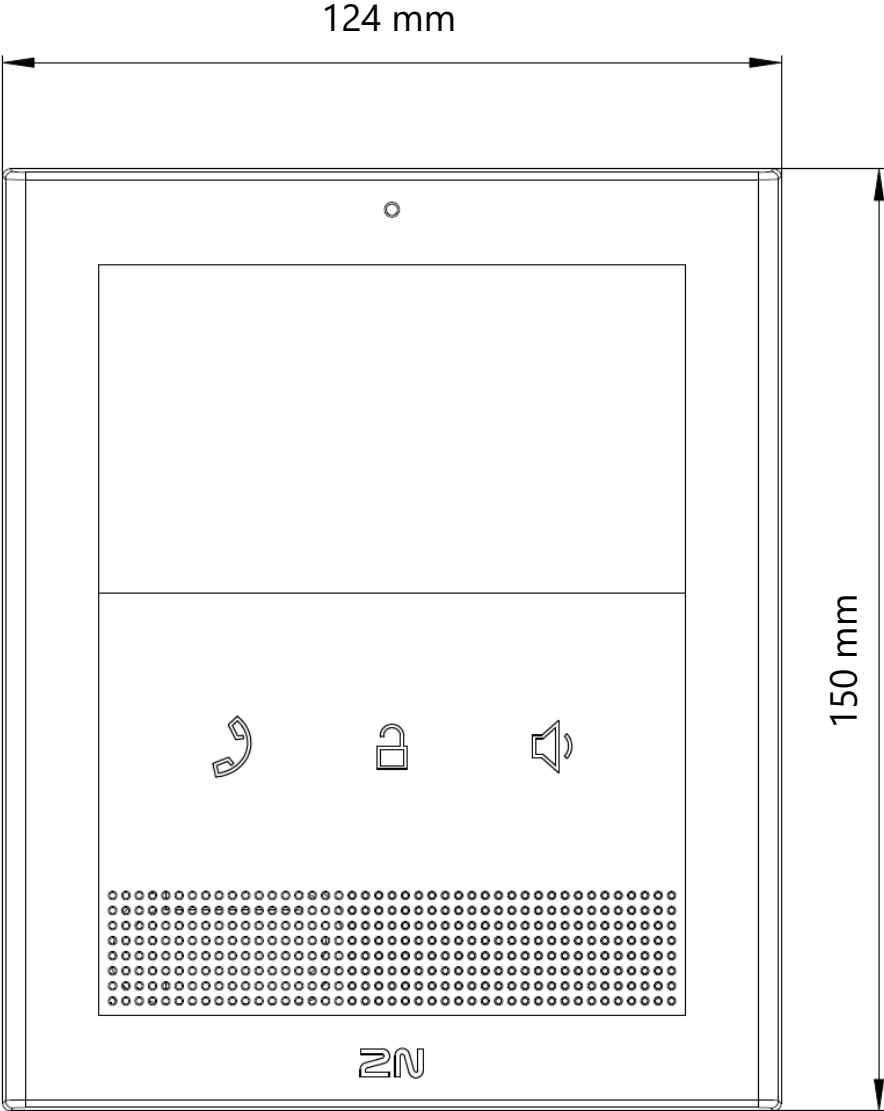

235 g




E2E mid-range solution



Bring premium quality to mid-priced residential projects

With the 2N® Clip in your portfolio, you can easily offer comprehensive 2N solution even to the price sensitive projects

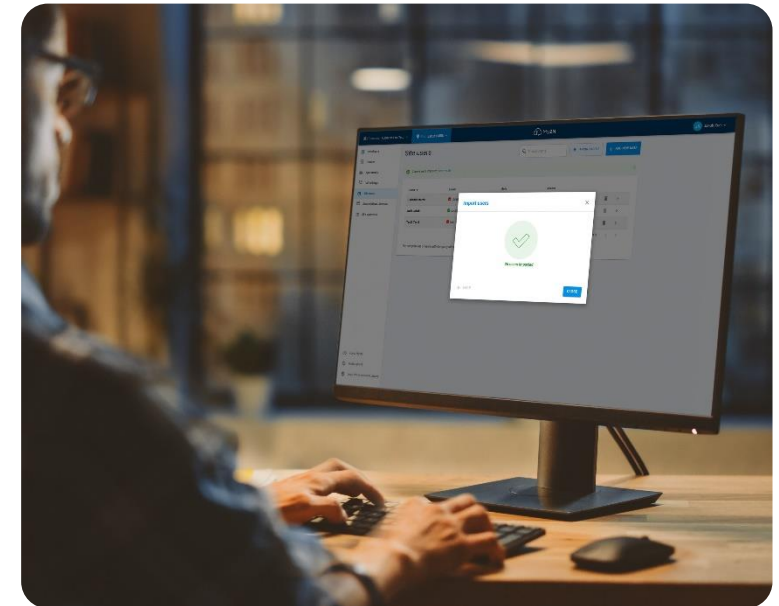

**Bring the power of IP
to every home**